


PREASSEMBLED

3" Overhang exterior roof featuring EPDM membrane standard with limited 10-year warranty against leaks.

(DS) Exterior and interior wall surfaces are flush, smooth and unbroken by visible seams or caulked joints.

High security 1 3/4" heavy duty anodized aluminum swing or top-suspended sliding door.

Durable steel construction consisting of 2"x2"x.120 structural ASTM A500 Grade B welded steel tubing, 14 gauge exterior wall panels and 16 gauge interior wall panels.

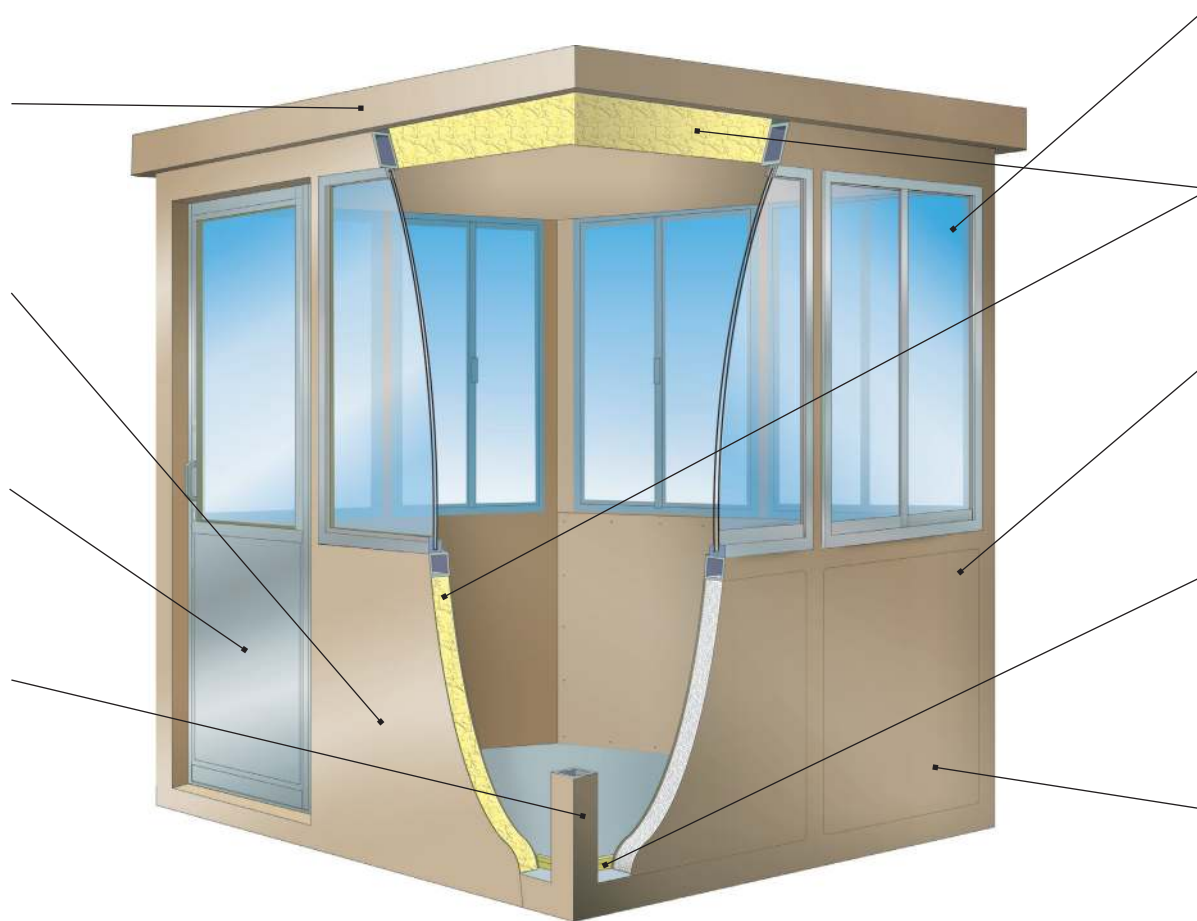

Windows are standard and available as fixed or sliding type and feature 3/16" clear tempered safety glass.

Fully insulated walls and ceiling.

(DSPC) Exterior "pan construction" is mechanically fastened to allow for field replacement of damaged panels.

1 1/2" Solid insulating floor structure with maintenance-free aluminum treadplate finished floor.

All steel surfaces are electrostatically painted with rust inhibitive epoxy primer and have a finish coat of air-dry industrial acrylic paint.

DURASTEEL / DURASTEEL PC