


2"x2" ANCHOR TAB  
w/ 5/8" DIA. HOLE  
(TYP. 4)

NOTE: CLEAR  
DOOR OPENING  
TO BE 20 1/2"


PLAN VIEW

DURASTEEL MODEL 54SL BUILDING NOTES :

- ① 100 AMP SINGLE PHASE 12 CIRCUIT LOAD CENTER W/MAIN BKR.
  - ② 115V DUPLEX, 230V OUTLET
  - ③ 34 WATT SURFACE MTD. FLUORESCENT LIGHT
  - ④ 22" DEEP SHELF
- \* 3" OVERHANG EXTERIOR MEMBRANE ROOF  
 \* 1- HEAVY DUTY ALUMINUM DOOR w/HALF GLASS AND ADA HANDLES  
 \* GLAZING- CLEAR TEMPERED GLASS  
 \* INSULATION- WALLS R-10, CEILING R-19  
 \* ALUMINUM TREAD PLATE FLOOR  
 \* BUILDING PAINTED- ADVISE COLOR  
 \* UL LABEL FOR COMPLIANCE WITH THE N.E.C.

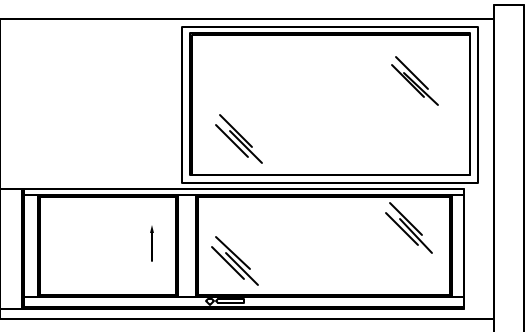

ELEVATION A

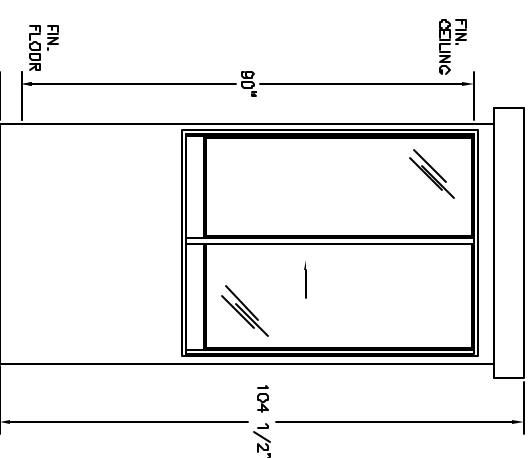

ELEVATION B

NOTES:  
 SLIDING DOORS AVAILABLE BOTH SIDES- SUFFIX DSL  
 CASHIER WINDOW AVAILABLE IN DOOR- SUFFIX CSL  
 SWING DOOR AVAILABLE IN REAR OF BOOTH- SUFFIX SW

*portaking*  
**PORTA-KING BUILDING SYSTEMS**

4133 SHORELINE DRIVE EARTH CITY, MISSOURI 63045  
 1-800-456-5464 FAX 314-291-2857 www.portaking.com

TITLE DURASTEEL MODEL 54SL